

Curvatura™ 3-D System



High Recycled Content



Two-Directional CURVATURA System with Perforation/
CURVATURA 24mm Suspension System

ESD Information

Recycled Content: Up to 90%

CUMAPlus Superior Performance for Mould/Mildew

★ Contributes to Green Star points ✓ ESD additional advantages

IEQ						Ene	Mat
Increase Daylight Levels	Reduce Lighting Levels	Internal Noise Level Reduction	Low Volatile Organic Compounds	Low Formaldehyde	Mould Prevention	Lighting Density Reduction	Design For Disassembly
		★					✓

Features and Benefits

- Create dramatic three-dimensional curved designs that combine shape, texture and lighting
- Curved main tee segments and flexible panels provide endless combinations
- Available in two configurations: One-Directional CURVATURA™ with 610mm x 1830mm infill panels, and Two-Directional CURVATURA™ with 610mm x 610mm panels
- Two suspension profiles: traditional CURVATURA (24mm grid profile) and CURVATURA Elite (15mm profile with 7mm reveal)
- Custom colours available

Applications

- Contemporary office environments
- Entertainment, gaming
- High-bay areas
- Retail space



One-Directional Curvatura



One-Directional Curvatura Elite

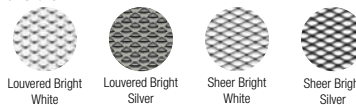
Call USG for colour samples

See Metal Finishes selector for panel, suspension and trim colour availability.

Painted Metals (HRC Finishes)



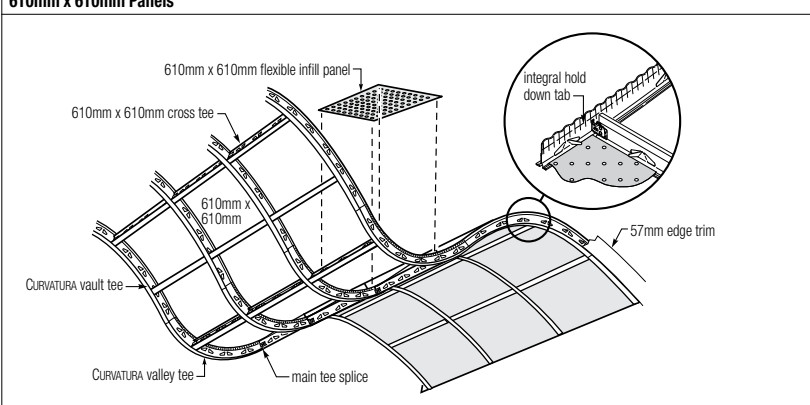


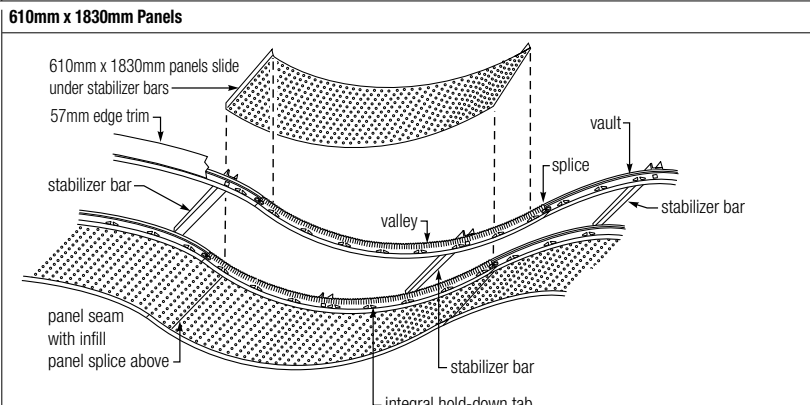

Diamondflex²



Curvatura™ 3-D System

Information
 usg.com.au
 info-anz@usg.com.au
 usg.co.nz
 info-anz@usg.co.nz
 usgdesignstudio.com.au

ESDInformation
 greenusg.com.au
 greenusg.co.nz

		Product Information			
		Materials		Finishes	
		Panel: Available smooth or perforated, in Painted Metals and Diamondflex expanded metal! 610mm x 610mm TRANSLUCENTS™ panels are also available.		Available with perforation and/or embossing	
Perspective	Two-Directional System	610mm x 610mm Panels 		Available Grid Profile Standard  CURVATURA Elite 	
	One-Directional System	610mm x 1830mm Panels 			
Curved Components (Available as vaults and valleys)	3048mm Length	2438mm Length	1830mm Length	1220mm Length	
	R = 5816mm	R = 4648mm	R = 3505mm	R = 2337mm	
	R = 3886mm	R = 3099mm	R = 2337mm	R = 1549mm	
	R = 2921mm	R = 2337mm	R = 1753mm	R = 1168mm	
	R = 1956mm	R = 1549mm	R = 1168mm	R = 787mm	
For More Information	Product literature System brochure: IC399 Data sheet: IC310-ANZ Design selector: IC36108 Perforation selector: IC425		Online tools usgdesignstudio.com.au usg.com/resources/onlinetools/ CurvaturaDesignCenter.jsp		Recycled Content CURVATURA aluminum panels: up to 90% recycled content; Steel panels: 25% recycled content. Suspension: 25% recycled content.
	Footnote 1. Requires perforation and Acoustibond backer. 2. Diamondflex and Wood Tone panels available for Two-Directional CURVATURA.		HRD High Recycled Content Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.		
		New South Wales Phone: 1800 226 215 Queensland Fax: 1800 786 946 Victoria (Free Call in Australia)	Auckland Head Office Phone: (09) 270 2595 Fax: (09) 270 1799	Wellington (04) 560 4528 (04) 560 4529	Trademarks used herein belong to USG Interiors, Inc. or a related company IC310-ANZ 09/11 © 2011

