



Rock Face® *ClimaPlus*™



ROCK FACE Panels with *CLIMAPLUS* Superior Performance/
DONN DX/DXL Suspension System

ESD Information

Recycled Content: 49%
CLIMAPLUS Superior Performance for Mould/Mildew

★ Contributes to Green Star points ✓ ESD additional advantages

IEQ						Ene	Mat
Increase Daylight Levels	Reduce Lighting Levels	Internal Noise Level Reduction	Low Volatile Organic Compounds	Low Formaldehyde	Mould Prevention	Lighting Density Reduction	Design for Disassembly
★	★	★	✓	✓	✓	★	✓

Advantages


- Specially compounded textured surface with hard core.
- Perfect for increased abuse resistance and sag resistance.
- *CLIMAPLUS* 30-year lifetime system warranty to withstand conditions up to 40°C/95% relative humidity without visible sag when used with a DONN® brand suspension system.
- Firecode™ formulation for Fire Rated ceilings.

Applications

- Athletic areas and exercise rooms
- Schools
- Corridors
- Dormitory rooms
- Gymnasiums
- Courthouses

Substrate

- Water-felted mineral fibre

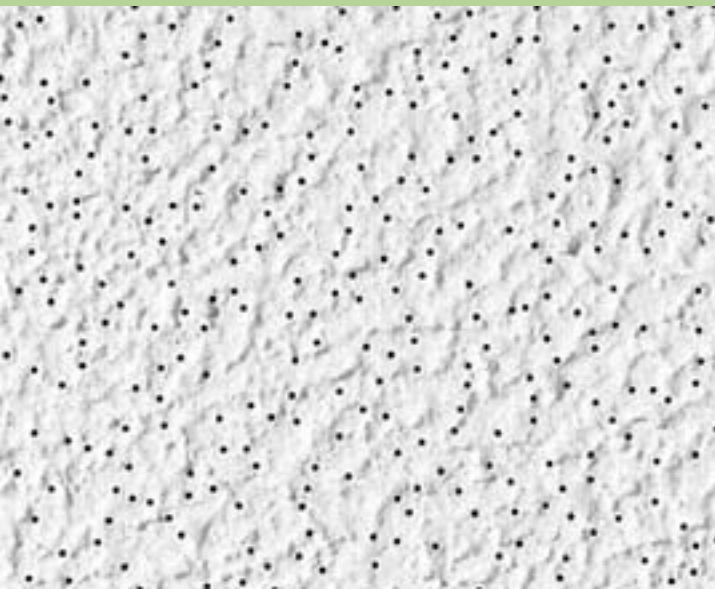

Fine-textured panel

Grid Options

DONN DX 24mm



Rock Face® ClimaPlus™

Information
 usg.com.au
 usg.co.nz
 info-anz@usg.co.nz

ESD Information
 greenusg.com.au
 greenusg.co.nz

30
 Year System Warranty
 - No visible sag
 - Mould/mildew protection

Rock Face
CLIMAPlus Panels

Edge	Panel Size ^{1,2}	Class	Item No	NRC ³	CAC ³ Min.	LR ⁴	Colour	Grid Options	VOC Emissions	Anti-Mould & Mildew ⁵	Abuse-Resistant	Recycled Content
SQ 	1200 x 600 x 15mm		ME56380	.50-.60	35-39	.86	White	A	Low			49%
	600 x 600 x 15mm		ME56335	.50-.60	35-39	.86	White	A	Low			49%

Legend

Low Emissions (VOC Class)

Classified as low-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods. Low-emitting is defined as having less than 13.5 ppb.

CLIMAPlus Superior Performance


Contains a broad-spectrum antimicrobial treatment on the face and back of the panel that provides guaranteed resistance against the growth of mould/mildew.

A
 DX®/DXL™



Retention Clip
 20428

Multiclip
 PPM

Grid Profile Options



Retaining Clips



Physical Data/ Footnotes

Weight
 4.9 kg/m²

Environmental Limitations
 40°C, 95% RH max.

Thermal Resistance
 R 0.28m² °C/W

Maximum Backloading
 0 kg/m²

Maintenance
 Can be cleaned easily with a soft brush or vacuum

Early Fire Performance

Index	Ignitability	Spread of Flame	Heat Evolved	Smoke Developed
AS/NZS 1530.3	0	0	0	2
ASTM E84	-	25	-	50
AS/NZS 3837	Group 1 – unsprinklered			

Durability test

ASTM D1037: Tested to 23 kgf for a 6mm depression by a Janka ball.

ASTM D5420: Tested to 0.8kgf/m for impaction.

Footnotes

- Not all panel sizes available in all geographic areas
- Some imperial sizes available to order
- Acoustic Test Standards
 NRC to ASTM C423
 CAC to ASTM E1414
- LR values are shown as averages
- Panel face and back surfaces treated with a patented, broad-spectrum antimicrobial standard formulation that inhibits and retards the growth of mould/mildew.
- Trademarks used herein belong to USG Interiors, Inc or a related company

Safety First!

Follow good safety and industrial hygiene practices during handling and installing of all products and systems. Take necessary personal precautions and wear the appropriate personal protective equipment as needed. Read material safety data sheets and related literature on products before specification and/or installation.



green building council australia
 MEMBER



USG Australasia

Queensland

Phone: (07) 3852 5937
 Fax: 1800 786-946 (free fax)

New South Wales

(02) 8850 3935
 1800 786-946 (free fax)

Victoria

(03) 9639 0900
 1800 786-946 (free fax)

Auckland Head Office

(09) 636 3680
 (09) 636 3679

Wellington

(04) 560 4528
 (04) 560 4529

RF/1-09